

Vice

SKU# 220880, 220881

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 3 year warranty. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- This light fitting is not suitable for use with dimmer switches. Warranty will be void if the fitting is used on the same circuit which has a dimmer switch.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- This light fitting is not suitable for use with dimmer switches and should not be used with a circuit which has a dimmer.
- Select a suitable location for installation;
 - The mounting point must support 2 times the weight of the fitting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

1. Remove all packaging material from the product.
Loosen the screws on each side of the fitting.
2. Remove the front cover from the fitting.
3. Use the back plate as a template to mark the screw positions onto the wall.
Drill holes into the wall and push the plastic screw anchors into the holes.
Install the back plate onto the wall by using appropriately sized mounting screws.
Ensure the plastic screw anchors and the mounting screws used are suitable for the mounting surface.
4. Connect the earth and mains supply wire to the terminal block in the fitting.
Ensure that the wires are secure and no bare wires are exposed.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red


Fitting Wire

Yellow/Green

Blue

Brown

5. Attach the front cover back onto the back plate by hooking onto the top of the back plate.
6. Secure the front cover to the back plate by securing the screws on the side.
7. Check that the fitting is fully secure and working.

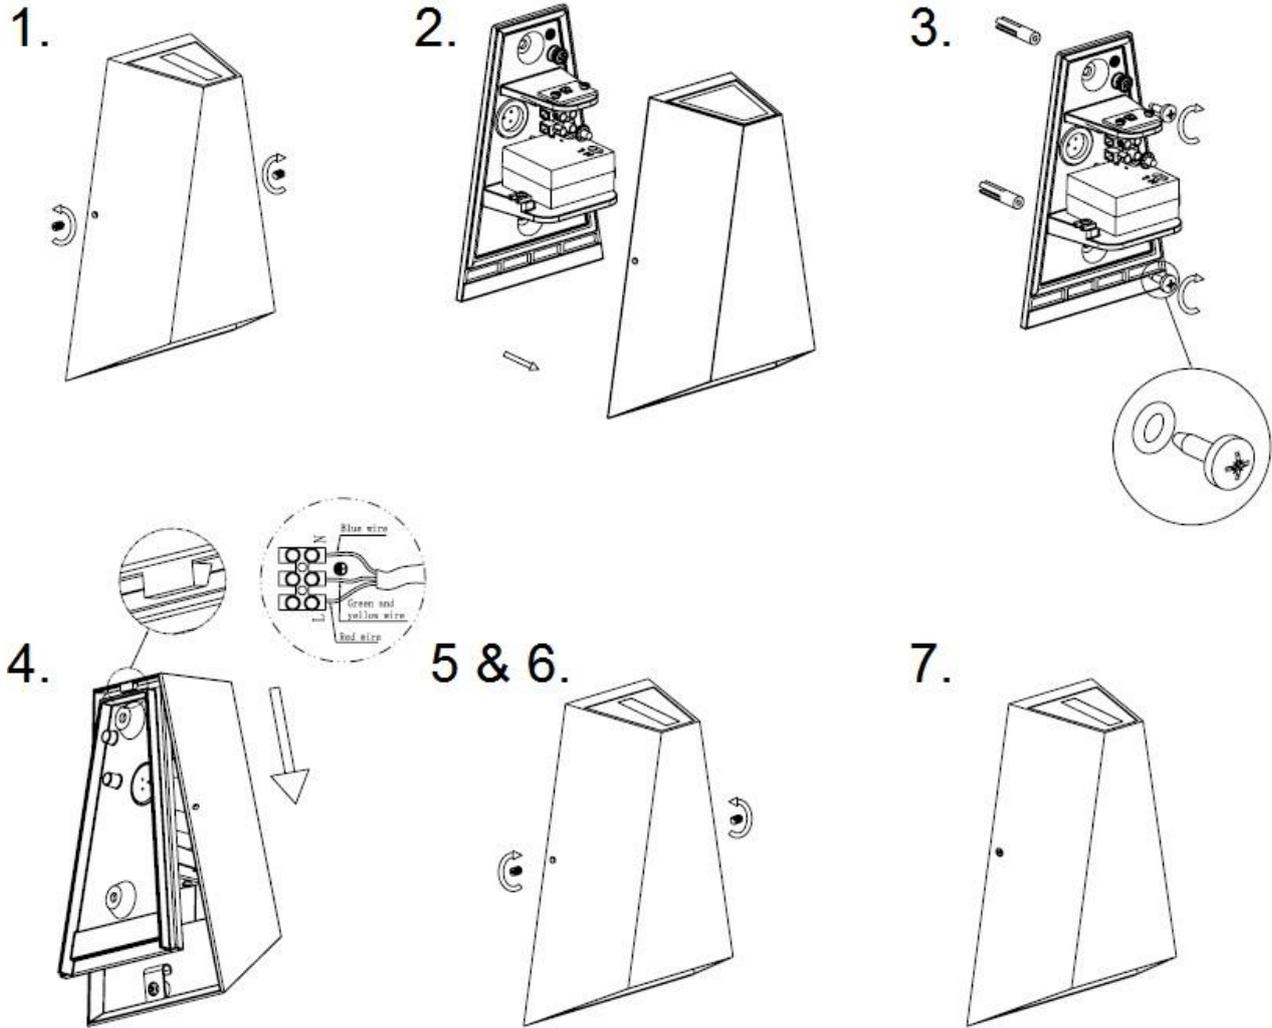

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	220880	220881
Model #	LD-2551-LED/SL	LD-2551-LED/CH
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	7W including driver	
LED	CREE LEDs, 3000K	
IP Rating	IP44	
Weight	0.45kg	
Dimensions	H:173mm W:110mm Ext:62mm	