

## Pirouette

SKU# 020289

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

### Warranty

- This light fitting is covered by a 12 month warranty. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

### Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
  - This product is suitable for indoor use only.
  - This product is non dimmable.
  - Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas.
  - The mounting point must support 3 times the weight of the fitting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

### Installation directions

1. Select a suitable location to mount the fitting.
2. Drill the holes on the ceiling and hammer the anchors (b) into the holes, then secure the mounting bracket (a) to the ceiling via tightening the screws (d) and washers (c).
3. Connect the mains supply wire to the light fitting using the terminal block provided (e). Ensure that the wires are secure and no bare wires are exposed.

#### Mains Supply Wire

**Earth – Yellow/Green**

**Neutral – Blue or Black**

**Live – Brown or Red**

#### Fitting Wire


**Yellow/Green** 

**Blue**

**Brown**

4. Attach the canopy (g) to the ceiling and secure it on mounting bracket by tightening the screws (f).
5. Adjust the length of the steel cord (h) to balance the fitting.
6. Install light bulbs (included).
- 7.

8. Hang up the crystal chains to the lamp body as following figure (chain 1 to central point, chain 2 to circle 2, chain 3 to circle 3, chain 4 to circle 4).
9. Turn on power and enjoy your new lighting product.

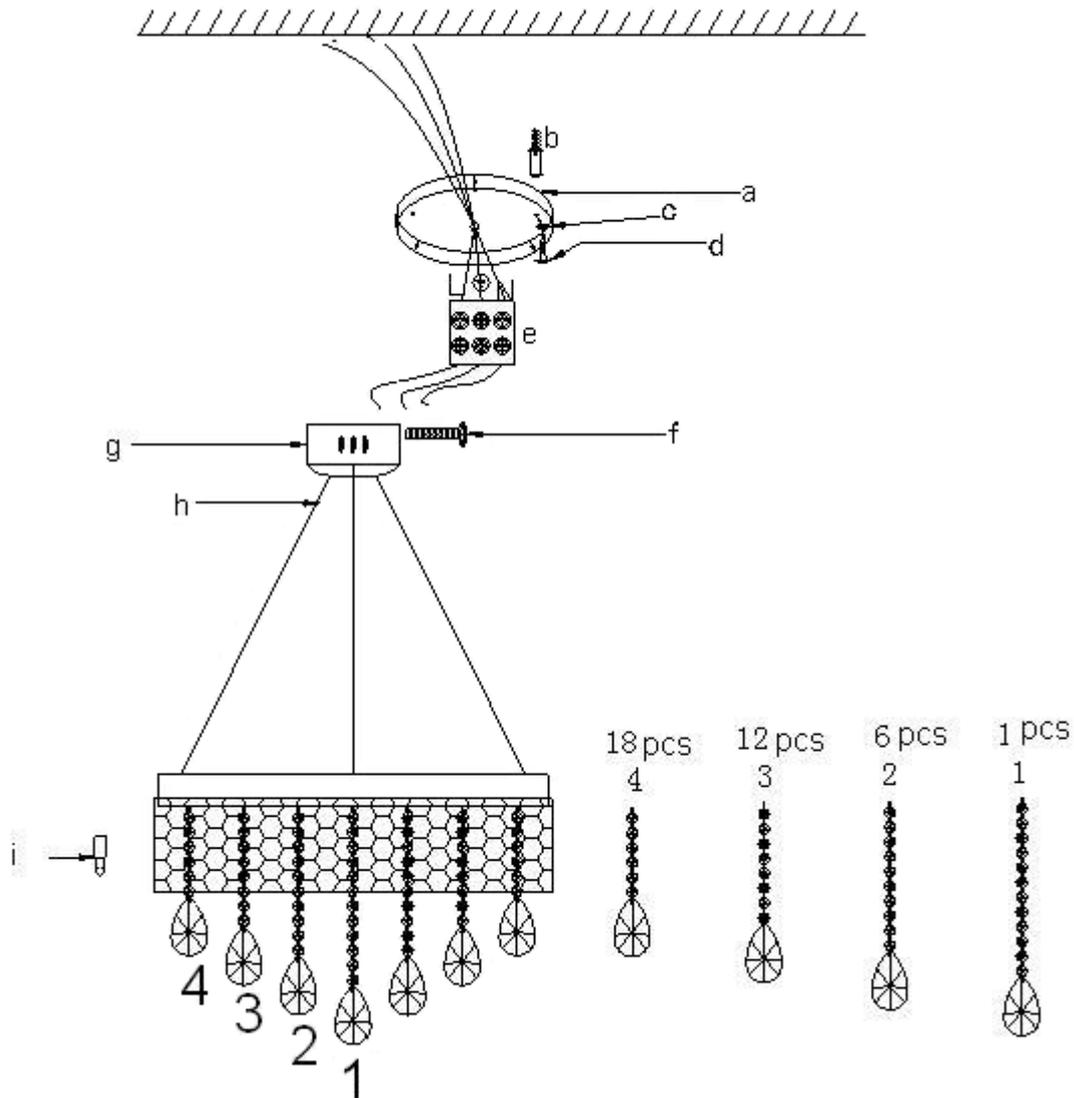

## Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications	
SKU #	020289
Model #	LD-3612-18
Rated Voltage	230-240V~ 50Hz
Rated Wattage	12V 18 X Max. 20W
Lamp Holder	G4
Weight	6.86kgs
Dimensions	D: 520mm H:1650mm