

**Installation Instructions**  
**SKU# 010180, 010181, 010182, 010183**  
**(LD-P3000/BK, LD-P3000/GD, LD-P3000/BC, LD-P3000/CH)**  
**Rated Voltage 220-240V~ 50Hz**

**THANK YOU FOR PURCHASING THIS QUALITY LUCCI PRODUCT, TO ENSURE CORRECT FUNCTION AND SAFETY, PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT. PLEASE KEEP THE INSTRUCTIONS FOR FUTURE REFERENCE.**

**WARRANTY:**

- This light fitting is covered by a 12 month warranty; please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

**INSTALLATION REQUIREMENTS:**

- **Must be installed by a licensed Electrician.**
- **All wiring must adhere to Local and National wiring codes. eg. AS/NZS 3000 latest edition.**
- **Do not exceed the maximum wattage rating.**
- **This product is suitable for indoor use only.**
- **The mounting point must be able to support 2 times the weight of the fitting.**

**INSTALLATION DIRECTIONS:**

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there is no component's missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure all power to the circuit you are working on has been switched OFF.
- Select a suitable location for installation. Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas. Ensure the mounting point can support 2 times the weight of the fitting.

1. Remove the mounting bracket (A) from the canopy by loosening the screws (E) on the sides.
2. Use the mounting bracket (A) as a template to mark the screw positions onto the ceiling.
3. Drill holes into the ceiling and push the plastic anchors (C) into the holes.
4. Install the mounting bracket (A) onto the ceiling by using screws (D) provided.  
Ensure the screws (D) used are suitable for the mounting surface.
5. Remove the cover from the terminal block (B) and connect the mains supply wire.  
Ensure that the wires are secure and no bare wires are exposed.


**Mains Supply Wire**

Earth – Yellow/Green  
Neutral – Blue or Black  
Live – Brown or Red

**Fitting Wire**

Yellow/Green ⊕  
Blue  
Brown

6. Place the terminal block cover firmly back onto the terminal block (B).
7. Install the canopy back onto the mounting bracket (A) and secure the screws (E) on the sides.
8. Install a globe (G - not included) into the lamp holder (F). Do not exceed the maximum wattage rating.  
Lucci Karbon Decorative ES T45 globe recommended.

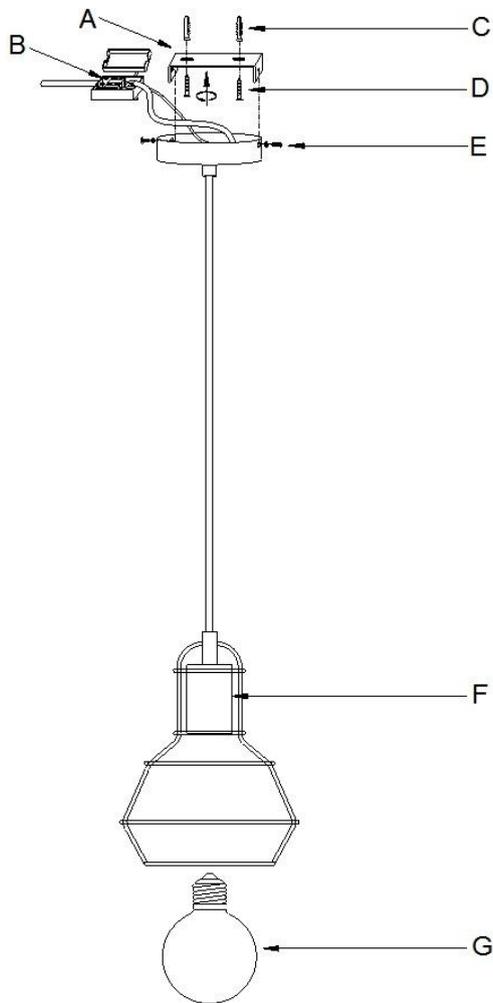

**TIPS:**

1. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance or adjustment to the fitting.
2. Always ensure the power is OFF and the fitting has cooled down before changing or cleaning the globe. Do not touch the globe with bare hands, use a clean cloth, gloves or a tissue.
3. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
4. Find a suitable location away from liquids and hazards.
5. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
6. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

**SPECIFICATIONS:**

SKU #	010180	010181	010182	010183
MODEL #	LD-P3000/BK	LD-P3000/GD	LD-P3000/BC	LD-P3000/CH
RATED VOLTAGE	220-240V~ 50Hz			
RATED WATTAGE	MAX. 60W *			
LAMP HOLDER	ES			
WEIGHT	0.52 kg			
DIMENSIONS	175mm x 225mm (D x H)			

\* Lucci Karbon Decorative ES G95 globe recommended.