

LEDLUX CIRCA RING

SKU# 020576, 020577, 020578

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep instructions for future reference.

Warranty

- This light fitting is covered by 3 years warranty. The warranty is from the date of purchase, not the date of installation. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - Ensure the fitting is not installed in direct line of an air vent/system and is not placed in any moist or damp areas.
 - The mounting point must support 2 times the weight of the fitting.
- This fitting is dimmable and has been tested with the Clipsal 32E450TM, 32E450UDM and LUCCI SKU# 290998 dimmer. The use of non-recommended dimmers will void your warranty and may damage your LED fitting.
NOTE: For the best dimming range use with the LUCCI SKU# 290998 trailing edge dimmer.
NOTE: The fitting may not be compatible with all types of dimmers. Dimming may cause buzzing sounds or a slight flicker in some instances. This is not a product fault and as such is not covered under warranty.
- Some dimmers have a minimum load of 20W. Before turning on the LED fitting, ensure the dimmer position is on the maximum setting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and ensure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Remove the mounting bracket from the canopy by loosening the screws on either side.
3. Use the mounting bracket as a template to mark the screw positions onto the ceiling and drill the holes.
4. Install the mounting bracket onto the ceiling using appropriately sized mounting screws and anchors (included). Ensure the screws and anchors used are suitable for the mounting surface.


5. Connect the mains supply wire to the LED driver and earth using the terminal blocks provided.

Mains Supply Wire	Fitting Wire
Neutral – Blue or Black	Blue
Live – Brown or Red	Brown
Earth – Yellow /Green	Yellow /Green 

6. Ensure that the wires are secure and no bare wires are exposed.

7. Attach the canopy back onto the mounting bracket by tightening the screws on either side.

NOTE: To prevent any damage to the wiring, ensure the wires are placed neatly in the canopy.

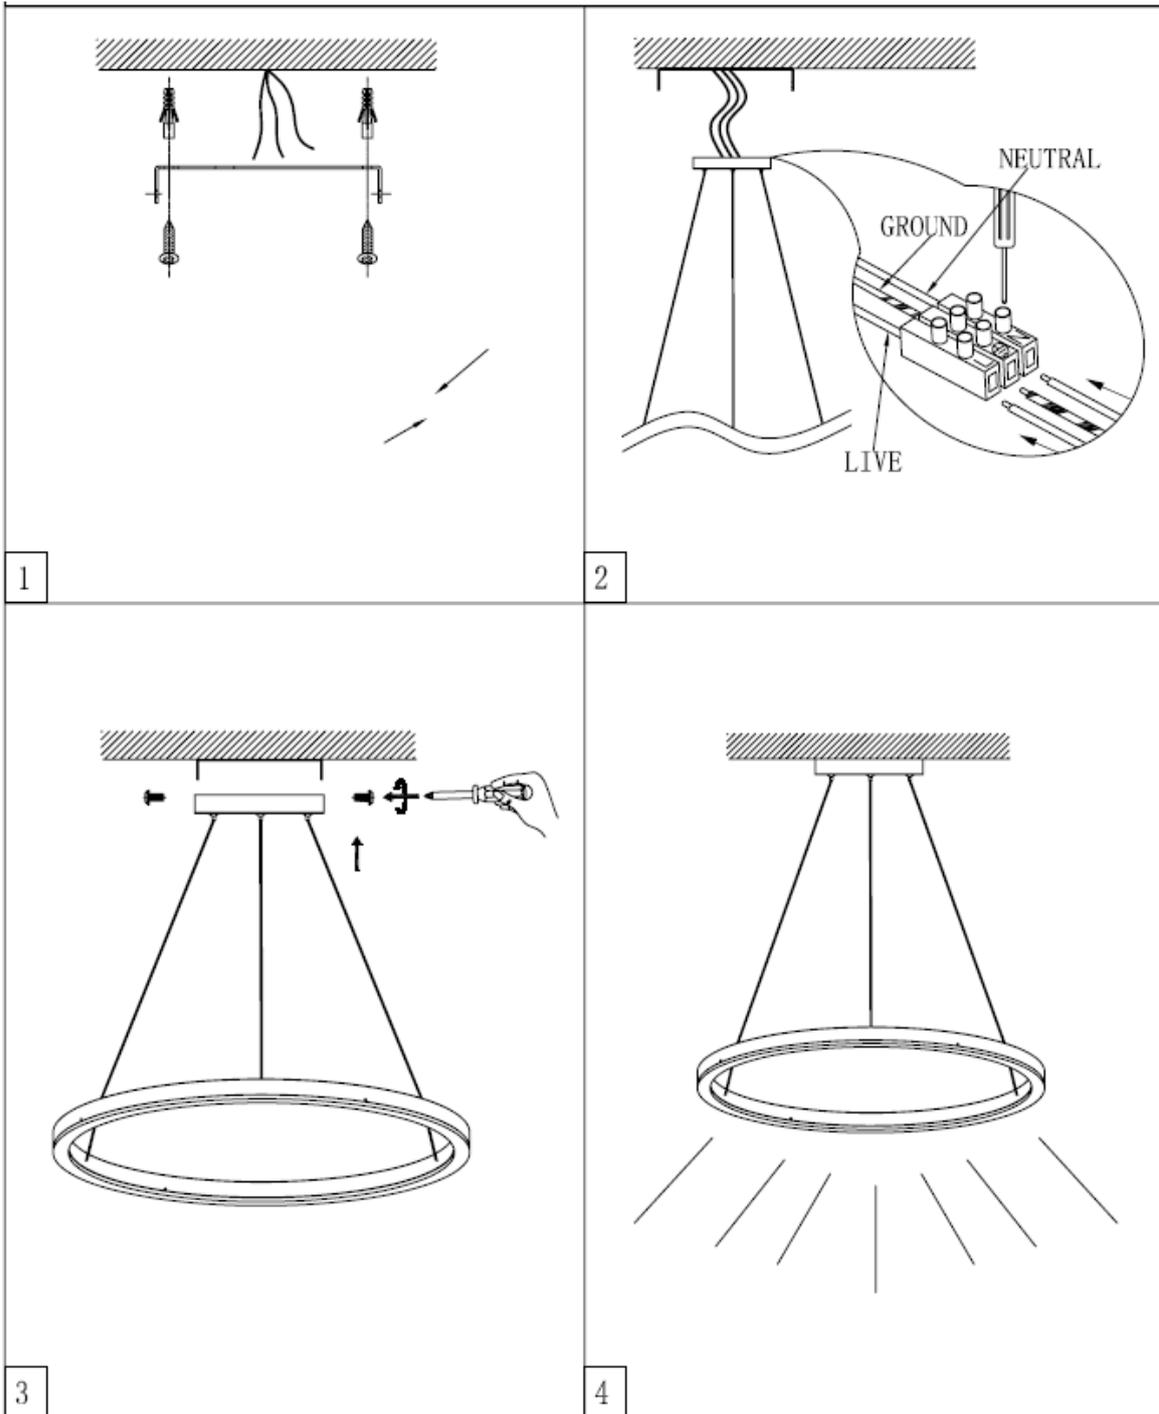

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	020576	020577	020578
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	27W	35W	45W
LEDs	3000K, 1200 lumens	3000K, 1600 lumens	3000K, 2000 lumens
Weight	2.2kg	2.6kg	3.3kg
Dimensions	D:450mm H:30mm Susp: 2000mm	D:600mm H:30mm Susp: 2000mm	D:800mm H:30mm Susp: 2000mm