

## Hensley

SKU# 011241, 011242, 011243

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This light fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.  
eg. AS/NZS 3000:2007/Amendment 2:2012 electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
  - This product is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the fitting. If you are unsure about the nature of your ceiling, consult a qualified installation contractor.
  - Ensure the fitting is not installed in direct line of an air vent/system and is not placed in any moist or damp areas.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

## Installation directions

- Due to the weight of the fitting, another person will be required to help with the installation when lifting up the fitting.
- Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on a smooth non scratch surface.
- Select the type of installation you require; Pendant or Close to Ceiling and follow the instructions and diagram.

### PENDANT INSTALLATION

1. Install the chain hanger (G) onto the canopy (E).
2. Install the chain hanger (I) onto the centre rod (J).
3. Install the centre rod (J) onto the fitting and secure by tightening the grub screws with the allen key (K) provided.
4. Connect the chain (H) onto chain hanger (G) at the canopy (E) by using the chain quick link (O).
5. Decide on the suspension length of your pendant and connect the other end of the chain (H) onto chain hanger (I) at the lamp end by using the chain quick link (O).  
When the pendant is hung up, ensure the weight of the fitting is on the chain (H). Ensure the cord (N) is not in tension.
6. Remove the mounting bracket (B) from the canopy (E) by loosening the two decorative nuts (F).
7. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
8. Loop the safety backup suspension cable (M) through the mounting bracket (B) or loop it onto a secure structure in the ceiling and tighten the cable lock at the end. If securing the safety backup suspension cable (M) onto a structure in the ceiling, ensure the structure can support 4 times the weight of the fitting.
9. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws or expansion bolts (A). Ensure the screws or expansion bolts (A) used are suitable for the mounting surface and the surrounding environment. If using expansion bolts (A), install the nut (C). The mounting point must support 2 times the weight of the fitting. If you are unsure about the nature of your ceiling, consult a qualified installation contractor.
10. Connect the mains supply wire to the terminal block (D). Ensure the wires are secure and no bare wires are exposed.

#### Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

#### Fitting Wire


Yellow/Green or 

Blue

Brown

11. Install the fitting onto the mounting bracket (B) and secure by tightening the two decorative nuts (F).
12. Install globes (L - not included) into the lamp holders. Do not exceed the maximum wattage rating.
13. Slide the crystals (R) into the fitting and hold them into position by installing the bracket (Q) and secure the bracket using the screws (P).
14. After the full assembly and installation, switch on the fitting to test and enjoy your new lighting product.

PENDANT INSTALLATION DIAGRAM

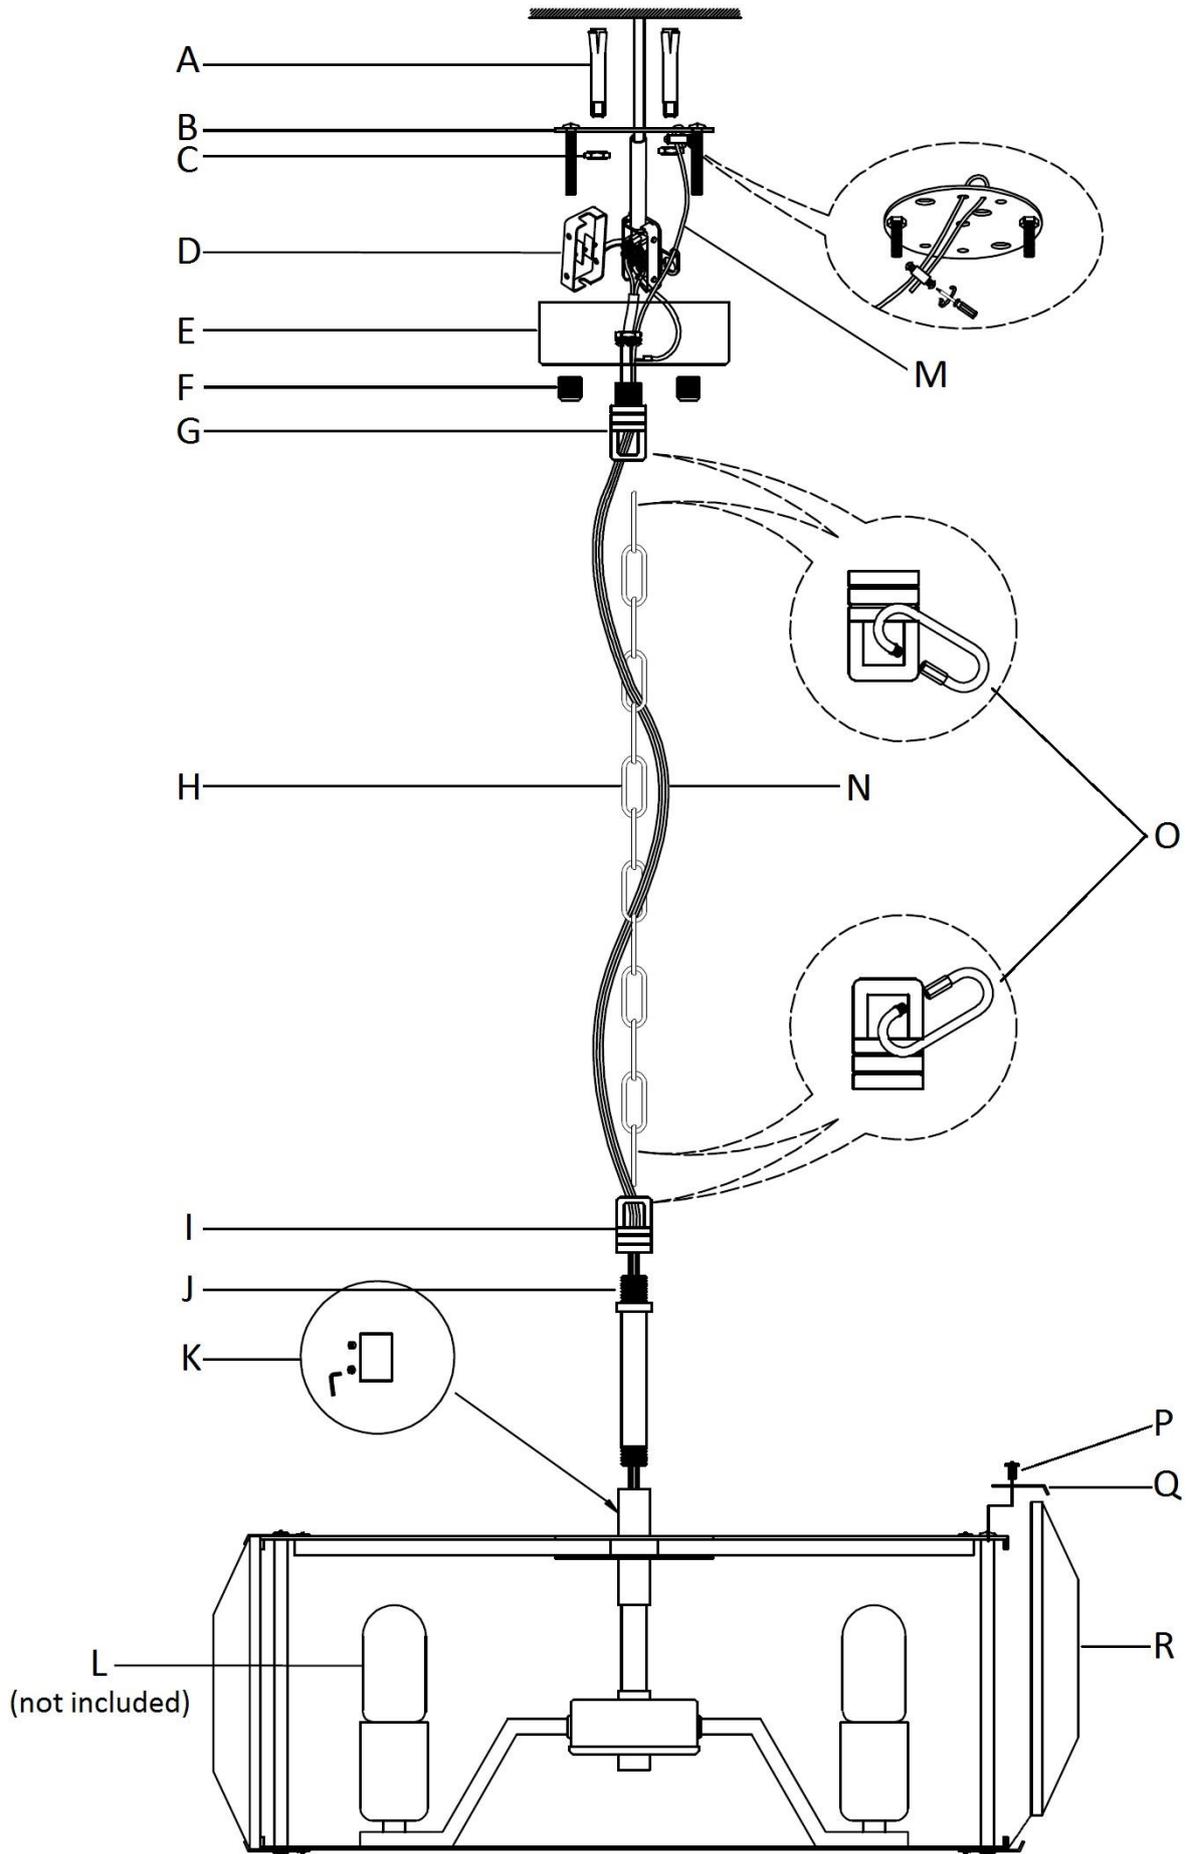

## CLOSE TO CEILING INSTALLATION

1. Install the centre rod (G) onto the fitting and secure by tightening the grub screws with the allen key (H) provided.
2. Install the canopy (E) onto the centre rod (G).
3. Remove the mounting bracket (B) from the canopy (E) by loosening the two decorative nuts (F).
4. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
5. Loop the safety backup suspension cable (J) through the mounting bracket (B) or loop it onto a secure structure in the ceiling and tighten the cable lock at the end. If securing the safety backup suspension cable (J) onto a structure in the ceiling, ensure the structure can support 4 times the weight of the fitting
6. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws or expansion bolts (A). Ensure the screws or expansion bolts (A) used are suitable for the mounting surface and the surrounding environment. If using expansion bolts (A), install the nut (C). The mounting point must support 2 times the weight of the fitting. If you are unsure about the nature of your ceiling, consult a qualified installation contractor.
7. Connect the mains supply wire to the terminal block (D). Ensure the wires are secure and no bare wires are exposed.

### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red


### Fitting Wire

Yellow/Green or

Blue

Brown

8. Install the fitting onto the mounting bracket (B) and secure by tightening the two decorative nuts (F).
9. Install globes (I - not included) into the lamp holders. Do not exceed the maximum wattage rating.
10. Slide the crystals (M) into the fitting and hold into position by installing the bracket (L) and secure with screws (K).
11. After the full assembly and installation, switch on the fitting to test and enjoy your new lighting product.

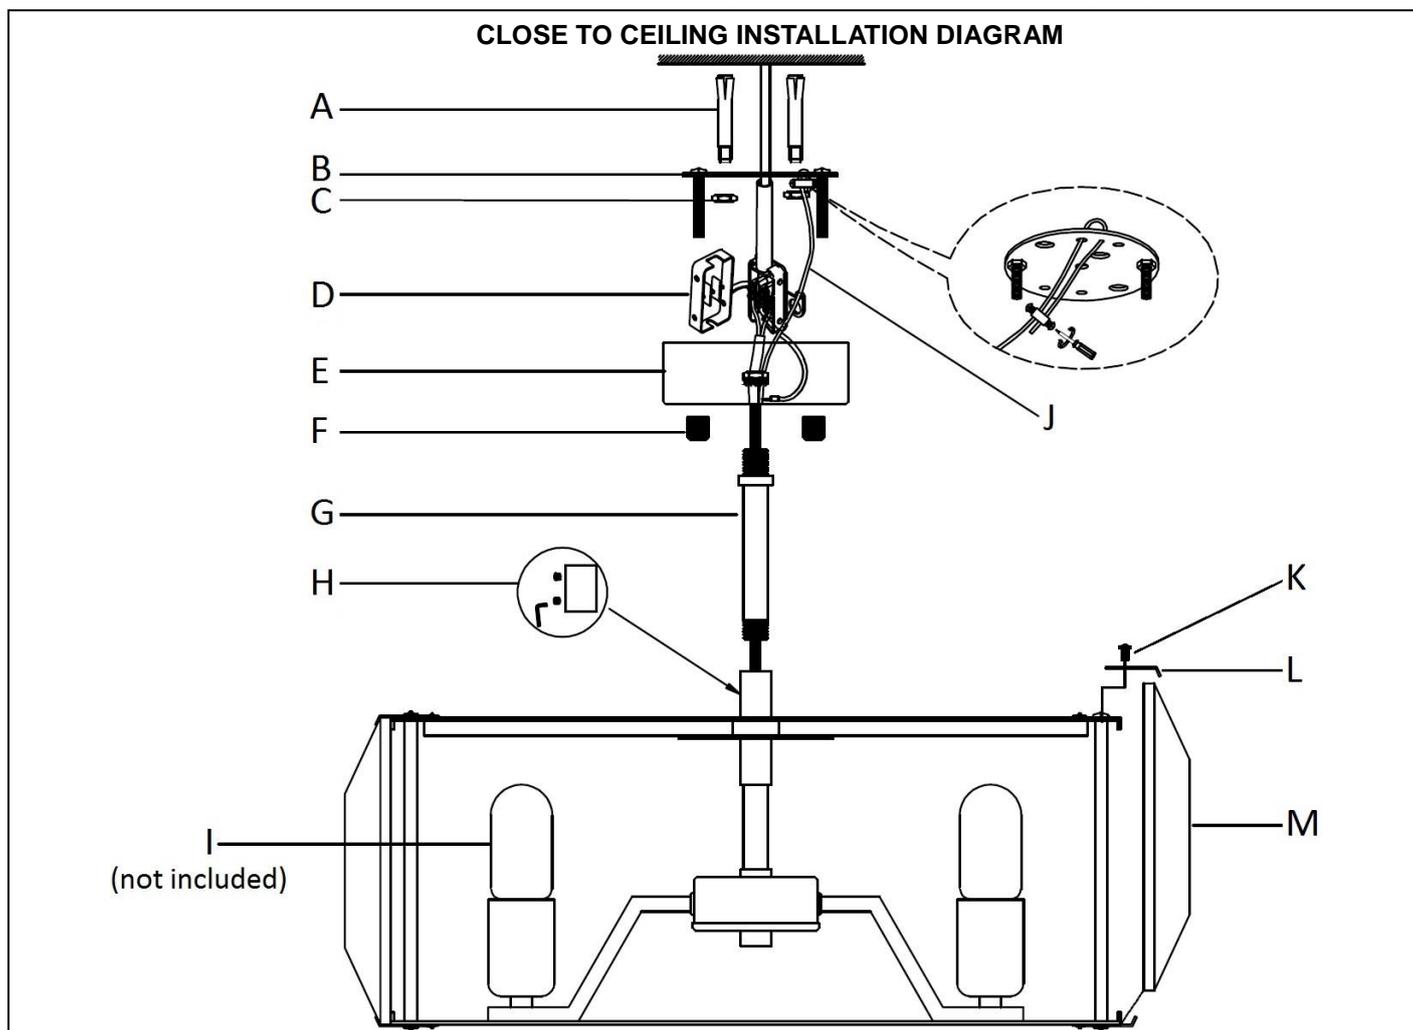

## Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Handle the fitting and crystal with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

## Specifications

SKU #	011241	011242	011243
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	180W (4 x 45W Max.)	225W (5 x 45W Max.)	315W (7 x 45W Max.)
Lamp Holder	ES / E27		
Weight	14.8kg	17.5kg	20.4kg
Dimensions	H:350mm Dia:370mm Susp:2000mm	H:350mm Dia:450mm Susp:2000mm	H:380mm Dia:530mm Susp:2000mm