

Installation Instructions
SKU# 030475 (LD-L81776 (12+6LT))
Rated Voltage 220-240V~ 50Hz

THANK YOU FOR PURCHASING THIS QUALITY LUCCI PRODUCT, TO ENSURE CORRECT FUNCTION AND SAFETY, PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT AND KEEP INSTRUCTIONS FOR FUTURE REFERENCE.

WARRANTY:

- This light fitting is covered by a 12 month warranty; please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

INSTALLATION REQUIREMENTS:

- **Must be installed by a licensed Electrician.**
- **All wiring and installation of the light fitting must adhere to local and national wiring codes. eg. AS/NZS 3000 latest edition.**
- **Do not exceed the maximum wattage rating.**
- **Check the installation circuit is appropriately rated for the fitting.**
- **This product is suitable for indoor use only.**
- **The mounting point must be able to support 2 times the weight of the fitting.**
- **Take care not to pull any electrical wires during unpacking as this may damage the connection.**
- **Lay out all the components on a smooth surface and make sure there is no component's missing before assembling.**
- **Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.**
- **Ensure all power to the circuit you are working on has been switched OFF.**
- **Select a suitable location for installation. Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas. The mounting point must support 2 times the weight of the fitting.**

INSTALLATION DIRECTIONS:

1. Remove the fitting from the packaging. The arms will be folded together when looking from the top (figure 1). Carefully reposition each of the arms (R), so that they are evenly spaced out from each other (figure 2).
2. Lock each of the arms (R) into position by using the lock nuts (Q).
3. Install the hanging ring (P) onto the fitting and be careful not to damage the wire.
4. Attach the chains onto the hanging ring (P) and tighten the chain quick link (O) by hand.
5. Use the mounting bracket (E) as a template to mark the screw positions onto the ceiling.
6. There are two sets of mounting screws provided: Set 1 (A, B, C) and Set 2 (D, F). Determine which set is appropriate for your mounting surface and install the mounting bracket onto the ceiling.
7. Fix the steel wire (I) to a solid object such as a ceiling truss or beam. If none are available, than fix the steel wire to the hook on the mounting bracket.
8. Adjust the length of the steel wire so that it is slightly slack. Lock the steel wire with the steel wire anchorage (H) and lock with the screw (G).
9. Connect the mains supply wire to the terminal block (J).


Mains Supply Wire

Earth – Yellow/Green
Neutral – Blue or Black
Live – Brown or Red

Fitting Wire

Yellow/Green ⊕
Blue
Brown

10. Ensure that the wires are secure and no bare wires are exposed.
11. Hang the fitting onto the mounting bracket (E) using the hook (K) in the canopy (L).
12. Push the canopy (L) up to the ceiling so it is flush and tighten into position with the screw (M) on the side.
13. Straighten and adjust the chain cover (N).
14. Install the lamp holder covers (T) by sliding them over the lamp holder (U).
15. Install globes (S - not included) into the lamp holders (U). Do not exceed the maximum wattage rating.

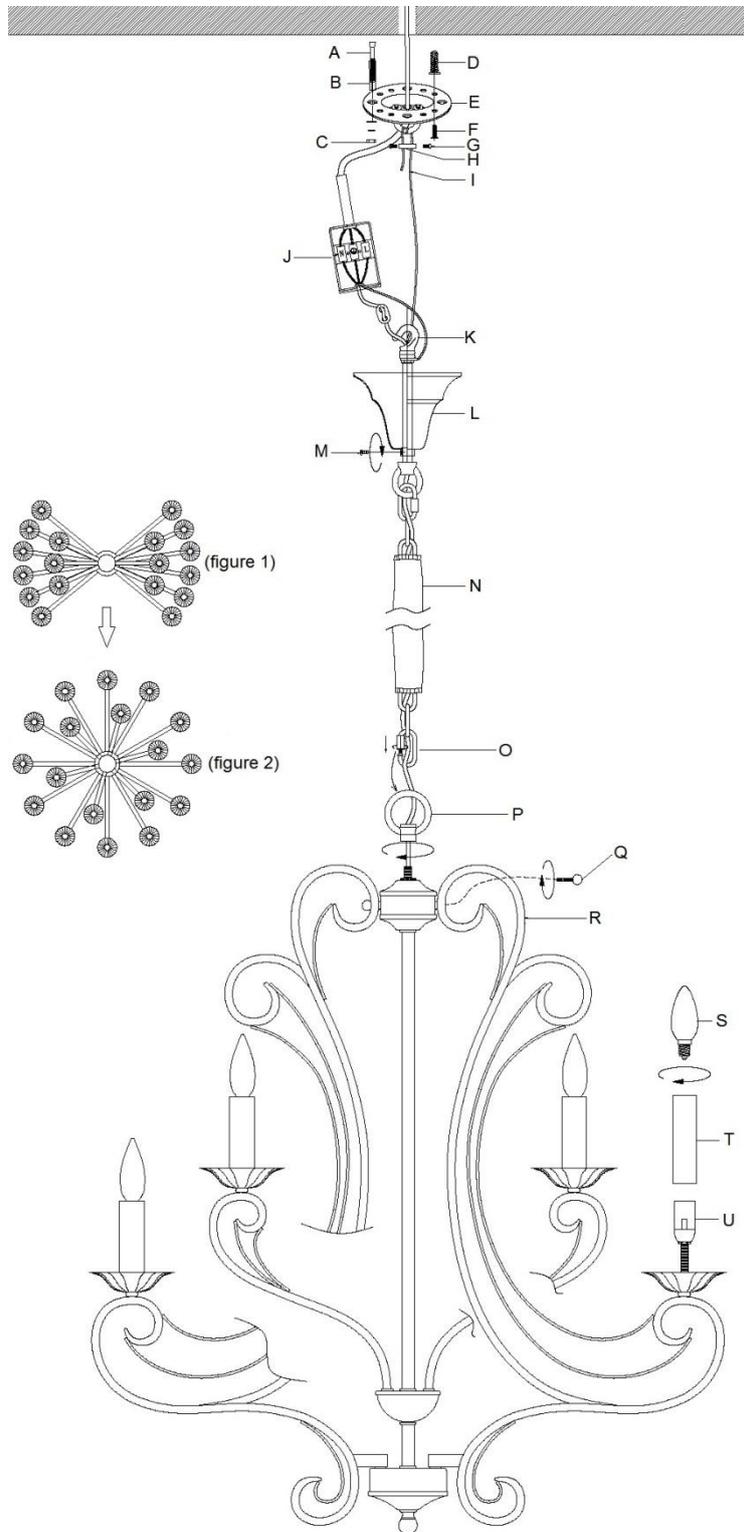

SAFETY TIPS:

1. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance or adjustment to the fitting.
2. Always ensure the power is OFF and the fitting has cooled down before changing or cleaning the globe. Do not touch the globe with bare hands, use a clean cloth, gloves or a tissue.
3. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
4. Find a suitable location away from liquids and hazards.
5. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
6. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

SPECIFICATIONS:

SKU #	030475
MODEL #	LD-L81776 (12+6LT)
RATED VOLTAGE	220-240V~ 50Hz
RATED WATTAGE	18 x MAX. 40W (720W)
LAMP HOLDER	SES
WEIGHT	31 kg
DIMENSIONS	980mm x 1080mm (D x H)