

Installation Instructions
SKU# 170188, 170531
(LD-AML-004-1/WW-WH, LD-AML-004-1/WW-BC)
(LED lamp only) – sold separately

SKU# 170189, 170536
(LD-AML-004/WW-WH, LD-AML-004/WW-BC)
(Kit Set: 2 LED lamps + LED driver) – sold separately
Rated Voltage 220-240V ~ 50Hz/60 Hz

THANK YOU FOR PURCHASING THIS QUALITY LUCCI PRODUCT. TO ENSURE CORRECT FUNCTION AND SAFETY, PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT. PLEASE KEEP THE INSTRUCTIONS FOR FUTURE REFERENCE.

WARRANTY:

- This fitting is covered by a 3 year warranty; please retain proof of purchase
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- This fitting is not suitable for use with dimmer switches.
Warranty will be void if the fitting is used on the same circuit which has a dimmer switch.

INSTALLATION REQUIREMENTS:

- This under cabinet LED light kit is suitable for DIY installation.
- This fitting is not suitable for use with a sensor controller as the switching mechanism.
- This fitting is not suitable for use with dimmer switches and should not be used on a circuit which has a dimmer installed.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - The mounting point must be smooth, flat and support 2 times the weight of the fitting.
 - The LED lamp and LED driver must not be installed next to any air vents, moist or damp areas (water kettle, aquarium fish tank etc.) or any heat sources (room heater, kitchen stove etc.).
- The fitting must not be used when the diffuser has been damaged.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there is no component's missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.



Note: While installing the LED lamp, be careful not to touch the LED chips and the PCB board.

INSTALLATION DIRECTIONS:





1. Remove all packaging material from the fitting and driver.
2. Select a suitable location for installation. Refer to the "Installation Requirements" statements above.
3. Using a small flathead screw driver, carefully pop out the LED diffuser cover to access the mounting holes. (figure 1)
4. Use the LED lamp to mark the location of the mounting holes and drill holes into the mounting location.
5. Install the plastic anchors into the holes.
6. Install the LED lamp onto the mounting location using the mounting screws provided. (figure 2)

Note: Screws and wall anchors provided are for concrete mounting surfaces.
Suitable screws for wooden or metal surfaces are required and are not included.

7. Install and clip the diffuser back onto the LED lamp and plug the DC power connector to the DC connector box. (Figure 3 and 4)

Note: Please ensure that there is a minimum of two LED lamps connected to the DC connector box before switching it ON.
The LED driver requires a minimum of 2 LED lamps connected to operate and a maximum of 3 LED lamps can be connected.

8. Turn on power and enjoy your new lighting product.

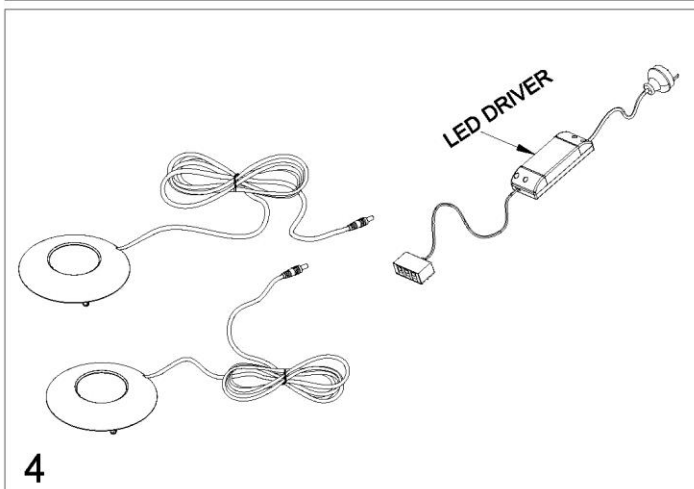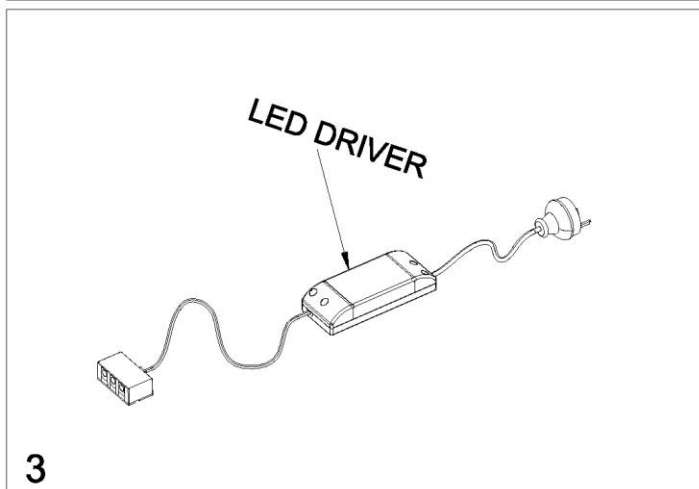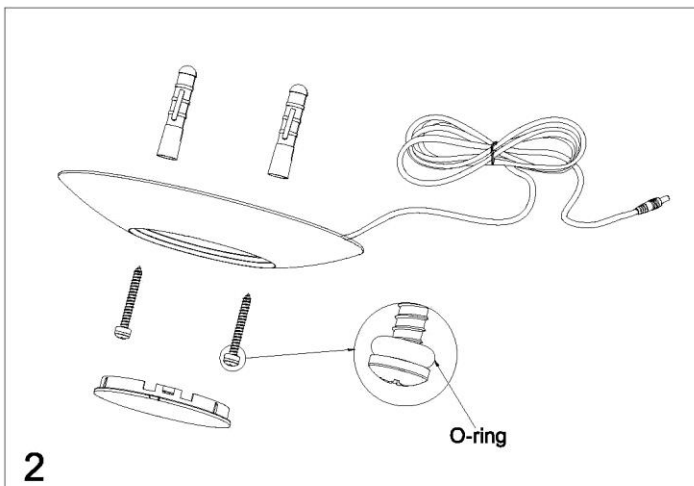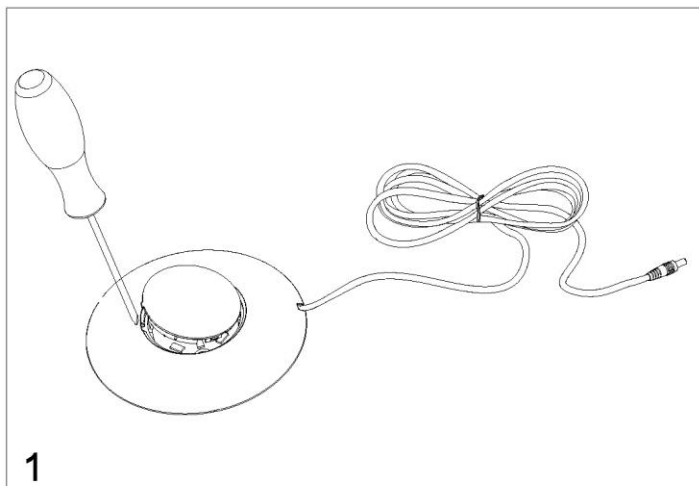

SAFETY TIPS:

1. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or adjustment to the fitting.
2. To clean, wipe with a damp clean cloth. Never soak the fitting in water.
3. To avoid injury or damage to the fitting, ensure the power cord is fully plugged in before using.
4. Handle the fitting and cover/shade with care to avoid breakage.
5. Select a suitable location away from liquids, hazards or flammable material.
6. Ensure that the fitting does not come in contact with any corrosive solvents or chemicals etc.

SPECIFICATIONS:

| SKU # | 170188 * | 170531 * | 170189 | 170536 |
|-------------------------|---|--------------------|---|------------------|
| MODEL # | LD-AML-004-1/WW-WH | LD-AML-004-1/WW-BC | LD-AML-004/WW-WH | LD-AML-004/WW-BC |
| CONTENTS | 1 LED lamp (LED driver not included) | | 2 LED lamps + LED driver | |
| RATED VOLTAGE | 8.7 – 10.5 VDC | | 220-240V~ 50Hz | |
| TOTAL POWER CONSUMPTION | 5W | | 12W (2 LED lamps + driver) 17.5W (3 LED lamps + driver) ** | |
| LED | Seoul LEDs, 3000K, 350 lumens | | Seoul LEDs, 3000K, 700 lumens | |
| LED DRIVER MODEL # | LED lamp only, driver not included | | TD0162N-D052 *** | |
| WEIGHT | 0.386 kg | | | |
| DIMENSIONS | ϕ 120mm x 12mm (ϕ Dia x H) – LED lamp only | | | |

* Only suitable for use with SKU# 170189 and 170536.

** Only when optional LED lamp is bought separately and connected together.

*** The driver requires a minimum of 2 LED lamps connected to operate and a maximum of 3 LED lamps can be connected.