

ACTION TRACK SPOT LIGHT

SKU# 150960, 150961, 150962, 150963, 150964, 150969, 150970, 150971, 150972, 150973

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by 3 years warranty. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas.
 - The mounting point must support 2 times the weight of the fitting.
- This fitting is dimmable and has been tested with the Clipsal 32E450TM, 32E450UDM and LUCCI SKU# 290998 dimmer.

NOTE: For the best dimming range use with the LUCCI SKU# 290998 trailing edge dimmer.

NOTE: The fitting may not be compatible with all types of dimmers. Dimming may cause buzzing sounds or a slight flicker in some instances. This is not a product fault and as such is not covered under warranty.





- Some dimmers have a minimum load of 20W. Before turning on the LED downlight, ensure the dimmer position is on the maximum setting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation directions

1. Remove all packaging material from the product.
2. Install the track in a suitable location (B).
3. Unscrew the inner screw (1) at the end of the track to slide the feed connector out from the track (A).
4. Unscrew the outer screw (2) on the plastic cover of the feed connector to join the mains supply power (A).
5. Follow the wiring markings on the back of the feed connector and ensure it is earthed (B).
6. Install the feed connector back into the track and ensure both screws are secured.
7. Align the power adaptor of the fitting into the track, and rotate the fitting by 90 degrees to lock into the track (C & D).

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Handle the fitting and/or shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

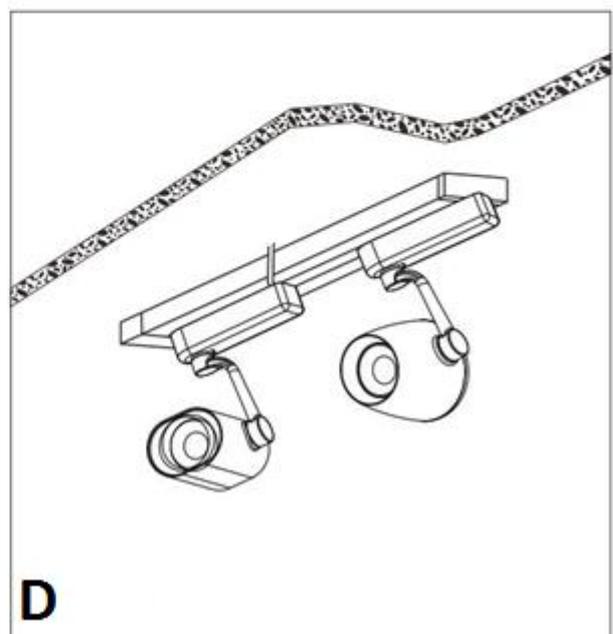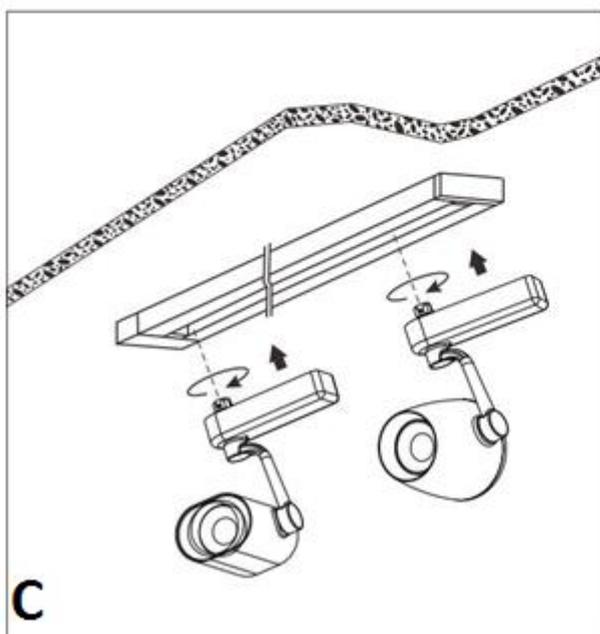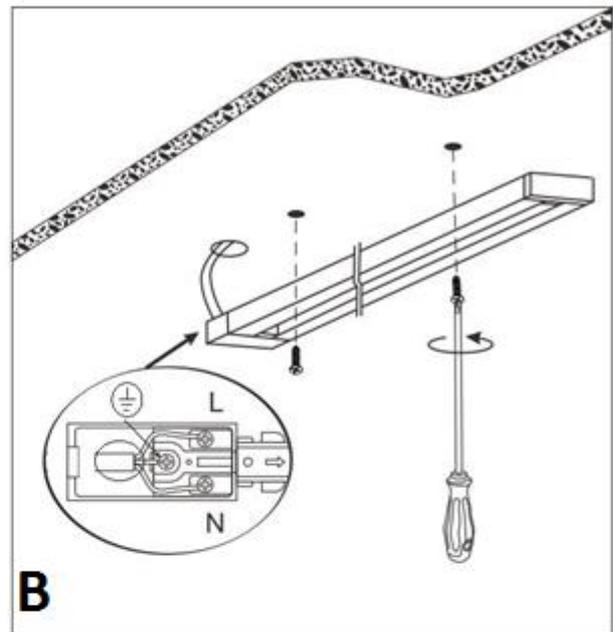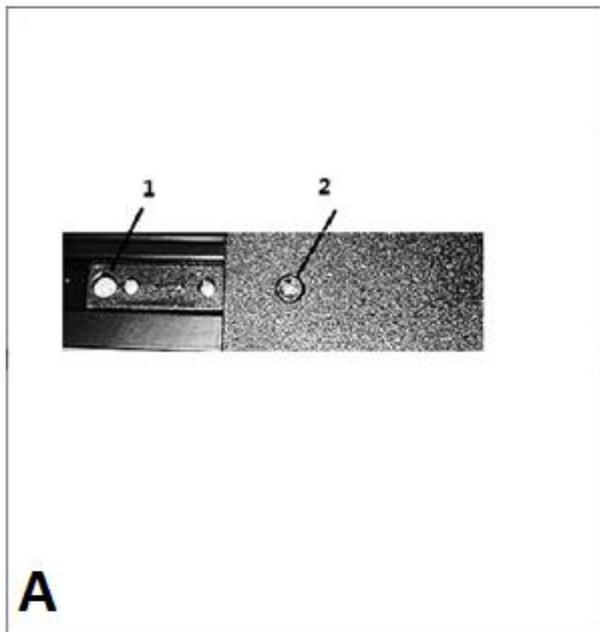

Specifications				
SKU #	150960, 150961,150962	150963, 150964,150969	150970,150971	150972,150973
Model #	LD-150960-DIM, LD-150961-DIM, LD-150962-DIM	LD-150963-DIM, LD-150964-DIM, LD-150969-DIM	LD-150970-DIM, LD-150971-DIM	LD-150972-DIM, LD-150973-DIM
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	12W	12W	24W	24W
LEDs	3000K, 600LM	3000K, 600LM	3000K, 1200LM	3000K, 1200LM
Weight	0.37kg	0.43kg	1.2kg	1.33kg
Dimensions	L:160mm W:90mm H:185mm	L:160mm W:90mm H:170mm	L:1000mm W:120mm H:190mm	L:1000mm W:120mm H:190mm
Packing list	1 pc oval track light	1 pc cone track light	2 pcs oval track light + 1 pc track system	2 pcs cone track light + 1 pc track system