

**Installation Instructions**  
**SKU# 230183, 230184**  
**(LD-5481/CH, LD-5481/SL)**  
**Rated Voltage 230-240V~ 50Hz**

**THANK YOU FOR PURCHASING THIS QUALITY LUCCI PRODUCT, TO ENSURE CORRECT FUNCTION AND SAFETY, PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT.**

**WARRANTY:**

- This light fitting is covered by a 12 month warranty; please retain proof of purchase and evidence of installation by a licensed electrician.

**INSTALLATION REQUIREMENTS:**

- **Must be installed by a Licensed Electrician.**
- **Must be installed according to the current wiring rules AS/NZS3000.**
- **This fitting is rated IP44, this must be maintained during installation.**
- **Do not exceed the maximum wattage rating.**
- **The mounting point must be able to support 4 times the weight of the fitting.**

**INSTALLATION DIRECTIONS:**

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
  - Lay out all the components on a smooth surface and make sure there is no component's missing before assembling.
  - Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
  - Ensure all power has been isolated for your own safety.
  - Select a suitable location for installation. This fitting is protected against water penetration to IP44 standards, which is splashing from all directions. It must not be left in a position where the product is subjected to constant water.
1. Remove the cover from the fitting by loosening the 4 screws at each corner. Use the allen/hex key provided.
  2. Remove the lamp holder plate from the fitting so that there is access to the back of the fitting.
  3. Use the fitting as a template to mark the screw positions onto the wall. Drill holes into the wall and put the plastic anchors into the holes. Install the fitting onto the wall with the screws provided. Ensure the screws used are suitable for the mounting surface. The mounting point must be able to support 4 times the weight of the fitting.
  4. Connect the earth and mains supply wire to the terminal block in the fitting. Ensure that the wires are secure and no bare wires are exposed.

**Mains Supply Wire**

Earth – Yellow/Green

Neutral – Blue or Black

Live – Brown or Red

**Fitting Wire**


Yellow/Green 

Blue


Brown

5. Install the lamp holder plate onto the fitting and install a light bulb (not included) into the lamp holder.
6. Attach the cover back onto the fitting and tighten the 4 screws in each corner.


1.

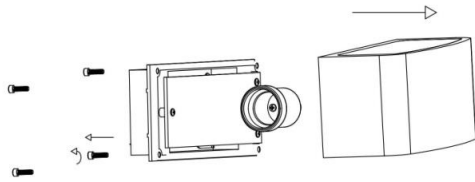


2.

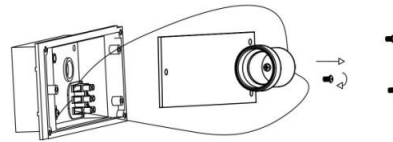


3.

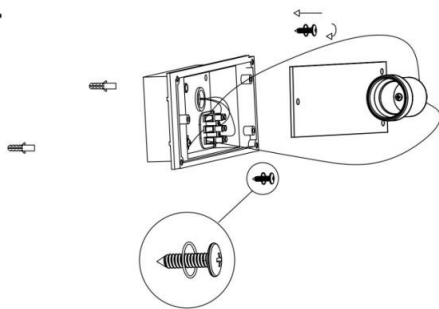


4.

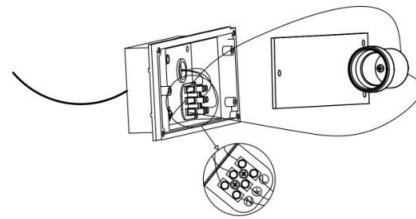

5.

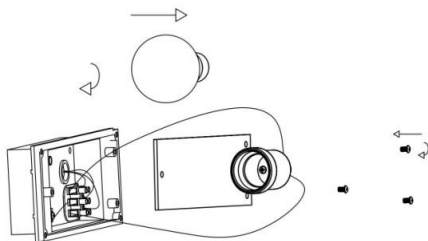

6.

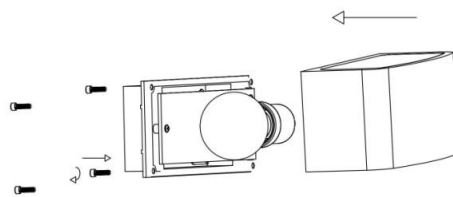

### **TIPS:**

1. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance or adjustment to the fitting.
2. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
3. Handle the fitting and cover/shade with care to avoid breakage.
4. When changing or cleaning bulbs, turn the power OFF and allow to cool. Do not touch bulbs with bare hands, use gloves or a tissue.
5. Find a suitable location away from liquids and hazards.
6. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
7. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

### **SPECIFICATIONS:**

SKU #	MODEL #	RATED VOLTAGE	RATED WATTAGE	LAMP HOLDER	IP RATING
230183	LD-5481/CH	230-240V~50Hz	Max 60W	E27	IP44
230184	LD-5481/SL	230-240V~50Hz	Max 60W	E27	IP44

