

DISKDIMMABLE LEDWALL BRACKET

SKU# 309051, 309052, 309053, 309054, 309055, 309056

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep instructions for future reference.

Warranty

- This light fitting is covered by 3 year warranty. The warranty is from the date of purchase, not the date of installation. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- The use of non-tested dimmers may damage your LED light fitting and will void the warranty.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules. eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed next to any air vent system.
 - When installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.

This fitting is dimmable and has been tested at the date of publication with the dimmers listed in the specification section. The use of a LED dimmers such as the Lucci LEDlux SKU# 290998 or 290997 is highly recommended.

NOTE: For the best dimming range, use with the Lucci LEDlux SKU# 290998 dimmer and adjust the variable resistor at minimum and maximum dimming positions on the dimmer during the installation.

NOTE: Dimming may cause buzzing sounds or a slight flicker. There may be slight delays with the LED light start up or slight uneven light performance when more than one LED light fitting is linked together, switched ON or dimmed. This is not a product fault and as such is not covered under warranty.

NOTE: Some dimmers have a minimum load of 20W. Ensure the dimmer position is on the maximum setting before turning on the LED light and adjust the dimmer down to your desired light level.

- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and ensure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Use the mounting bracket (B) as a template to mark the screw positions on the wall and drill the holes. Fig. 1
3. Install the mounting brackets (B) onto the wall by using appropriately sized mounting screws (C) and anchors (A). Ensure the screws (C) and anchors (A) used are suitable for the mounting surface. Fig. 1
4. Connect the mains supply wire to the light fitting using the terminal block (D) provided. Ensure that the wires are secure and no bare wires are exposed. Fig. 3

Mains Supply Wire

Neutral – Blue or Black

Live – Brown or Red

Fitting Wire




Blue N -Neutral

Brown L- Live

Wiring label

Place the terminal block (D) back into the fitting. Attach the lamp base onto the mounting bracket (B) and secure it by tightening the screws (E). Fig. 3

NOTE: To prevent any damage to the wiring, ensure the wires are placed neatly in the light fitting.

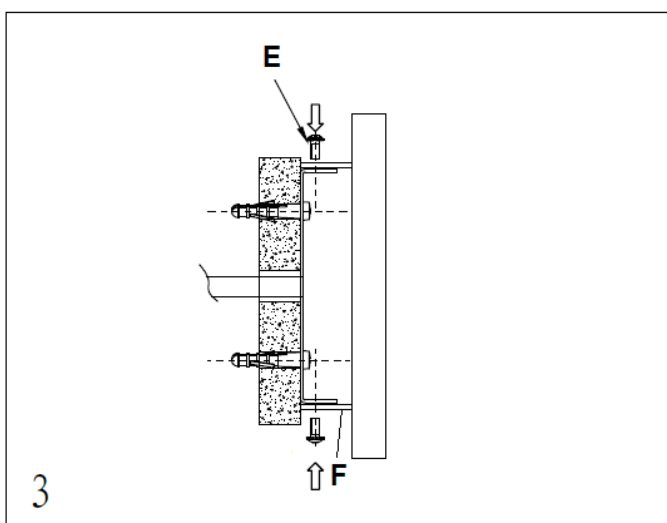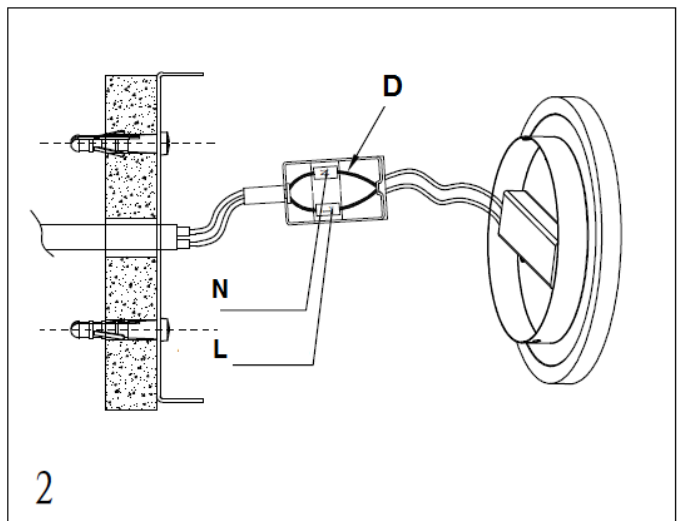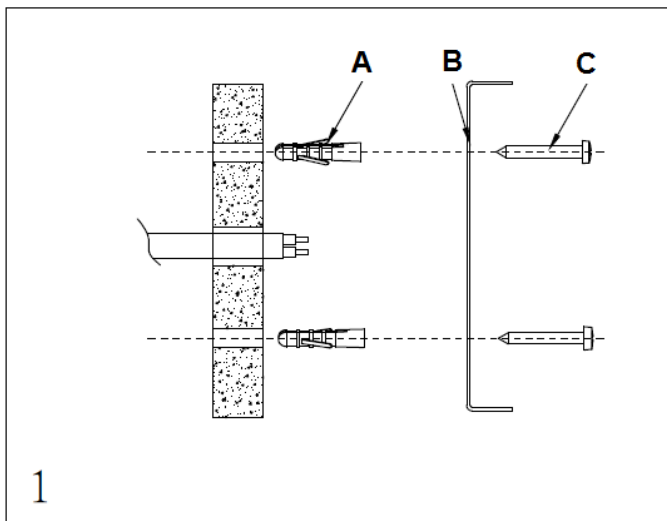

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, or

adjustment to the fitting.

- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	309051	309052	309053	309054	309055	309056
Colour	TEAK	Black	White	TEAK	Black	White
Rated Voltage	220-240V~ 50Hz					
Insulation Class	CLASS II					
Rated Wattage	10W			20W		
LEDs	EDISON, 3000K, 450lumens			EDISON, 3000K,900 lumens		
Weight	0.33kg			0.9kg		
Dimensions	H:150mm W:150mm E:40mm			H:250mm W:250mm E:40mm		
Dimmer Information	Highly Recommended Dimmers			Compatible Dimmers		
	Lucci LEDlux SKU# 290998, 290997			DIGINET LED Smart MEDM; Clipsal: 31E2RUDM, 32E450TM, 32E450UDM, 31EPUDM and 32ELEDM; HPM: Cat. 400T		