

VIVIENNE 8 LIGHT CHANDELIER

SKU# 060442

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This luminaire is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the luminaire.
 - Ensure the luminaire is not installed in direct line of an air vent/system.
 - If installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

NOTE: Due to the size and weight of the luminaire, two people may be required to lift up the luminaire during installation.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth non scratch surface.
2. Use the mounting bracket (H) as a template to mark the screw positions on the ceiling.
3. Install the mounting bracket (H) onto the ceiling by using appropriately sized mounting screws (J) and anchors (G). Ensure the screws (J) and anchors (G) used are suitable for the mounting surface and the surrounding environment.
4. Determine the suspension length required for your installation location. The chain suspension length can be adjusted by using the chain link connectors (B).

NOTE: Check and ensure the load/weight of the luminaire is NOT on the supply cord (Q) or safety loading wire (K). The load/weight of the luminaire must ALWAYS be on the chain suspension (R).


Installation Instructions

5. Hang the luminaire using the hook (L) onto the mounting bracket (H).
6. Insert and loop the safety loading wire (K) onto the mounting bracket (H).
7. Connect the mains supply wire to the terminal block (A).

Mains Supply Wire


Earth – Yellow/Green
 Neutral – Blue or Black
 Live – Brown or Red










Luminaire Wire / Terminal block

Yellow/Green or 
 Blue or N
 Brown or L

Ensure that the wires are secure and no bare wires are exposed.

8. Push the canopy (M) up so it is flush on the ceiling and secure it by tightening the screw (P) on the rod.
9. Install the lamp holder covers (E) onto the lamp holders, followed by the cups (D).
10. Carefully install the Egyptian crystals onto the luminaire. (D - 8 pieces, S - 4 pieces, T - 17 pieces, U - 32 pieces, V - 8 pieces, W - 17 pieces, X - 8 pieces, Y - 8 pieces).
11. Install globes (C - not included) into the lamp holders (F). Do not exceed the maximum wattage rating.
12. After the installation, switch on the luminaire to test and enjoy your new lighting product.

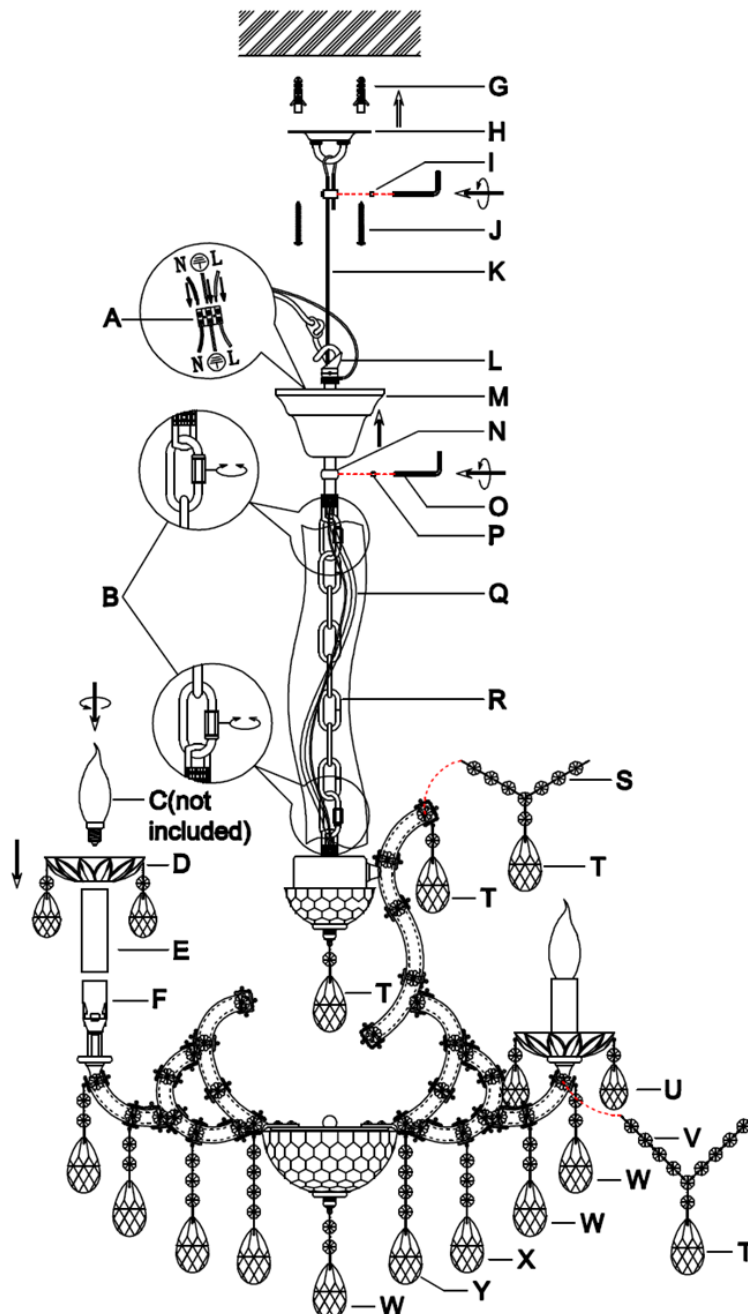

No.	Image	Sets
D		8
E		8
S		4
T		17
U		32
V		8
W		17
X		8
Y		8

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.

Specifications

SKU #	060442
Colour	Egyptian Crystal and Gun Metal Chrome
Rated Voltage	220-240V~ 50Hz
Rated Wattage	360W Max. (8 x Max. 45W)
Lamp Holder	SES / E14
Weight	13.9kg
Canopy Size	H:75mm Dia:120mm
Dimensions	H:580mm Dia:630mm Suspension:1000mm