

## SIRIUS LED DISPLAY SPOTLIGHT KIT

SKU# 157072, 157073

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality MFL product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty


- This fitting is covered by a 3 year warranty. The warranty is from date of purchase, not the date of installation.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.
- This fitting is not suitable for use with dimmer switches. Warranty will be void if the fitting is used on the same circuit which has a dimmer switch.
- This fitting is not suitable for use with a sensor controller as the switching mechanism. Warranty will be void if the fitting is used on the same circuit which has a sensor controller.

### Installation Requirements

- This fitting is a DIY (Do It Yourself) product, no electrical wiring connection or disconnection is required. The service of a licensed electrician is not required.
- This fitting is designed to be used with a socket outlet (not included). The installation location must have an existing socket outlet (not included) pre-installed. If it does not, please contact a licensed electrician to arrange installation of the socket outlet before continuing.
- Select a suitable location for installation:
  - This product is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the fitting.
  - Ensure the fitting is not installed in direct line of an air vent/system.
  - If installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the socket outlet you are working on has been switched OFF before commencing the installation.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. Loosen the cover from the base of spotlight by rotating it anti-clockwise (Fig A).
3. After the cover has been loosened from the base, two mounting holes can be accessed (Fig B).
4. Use the spotlight to mark the mounting holes onto the wall and drill a hole for the cord entry point.
5. Install the spotlight onto the wall by using appropriately sized mounting screws (Fig C).  
Ensure the screws used are suitable for the mounting surface and surrounding environment.
6. Install the covers back onto the base of the spotlight by rotating it clockwise (Fig D).
7. Connect the two spotlights to the DC connector box (Fig E).  
**NOTE: Must have a minimum of two spotlights connected to the DC connector box for normal operation.**
8. Insert the plug into the socket outlet (not included) and ensure it is fully plugged in.
9. Turn power on at the socket outlet (not included) and use the socket outlet to turn the fitting on/off.
10. After the installation, switch on the fitting to test and enjoy your new lighting product.

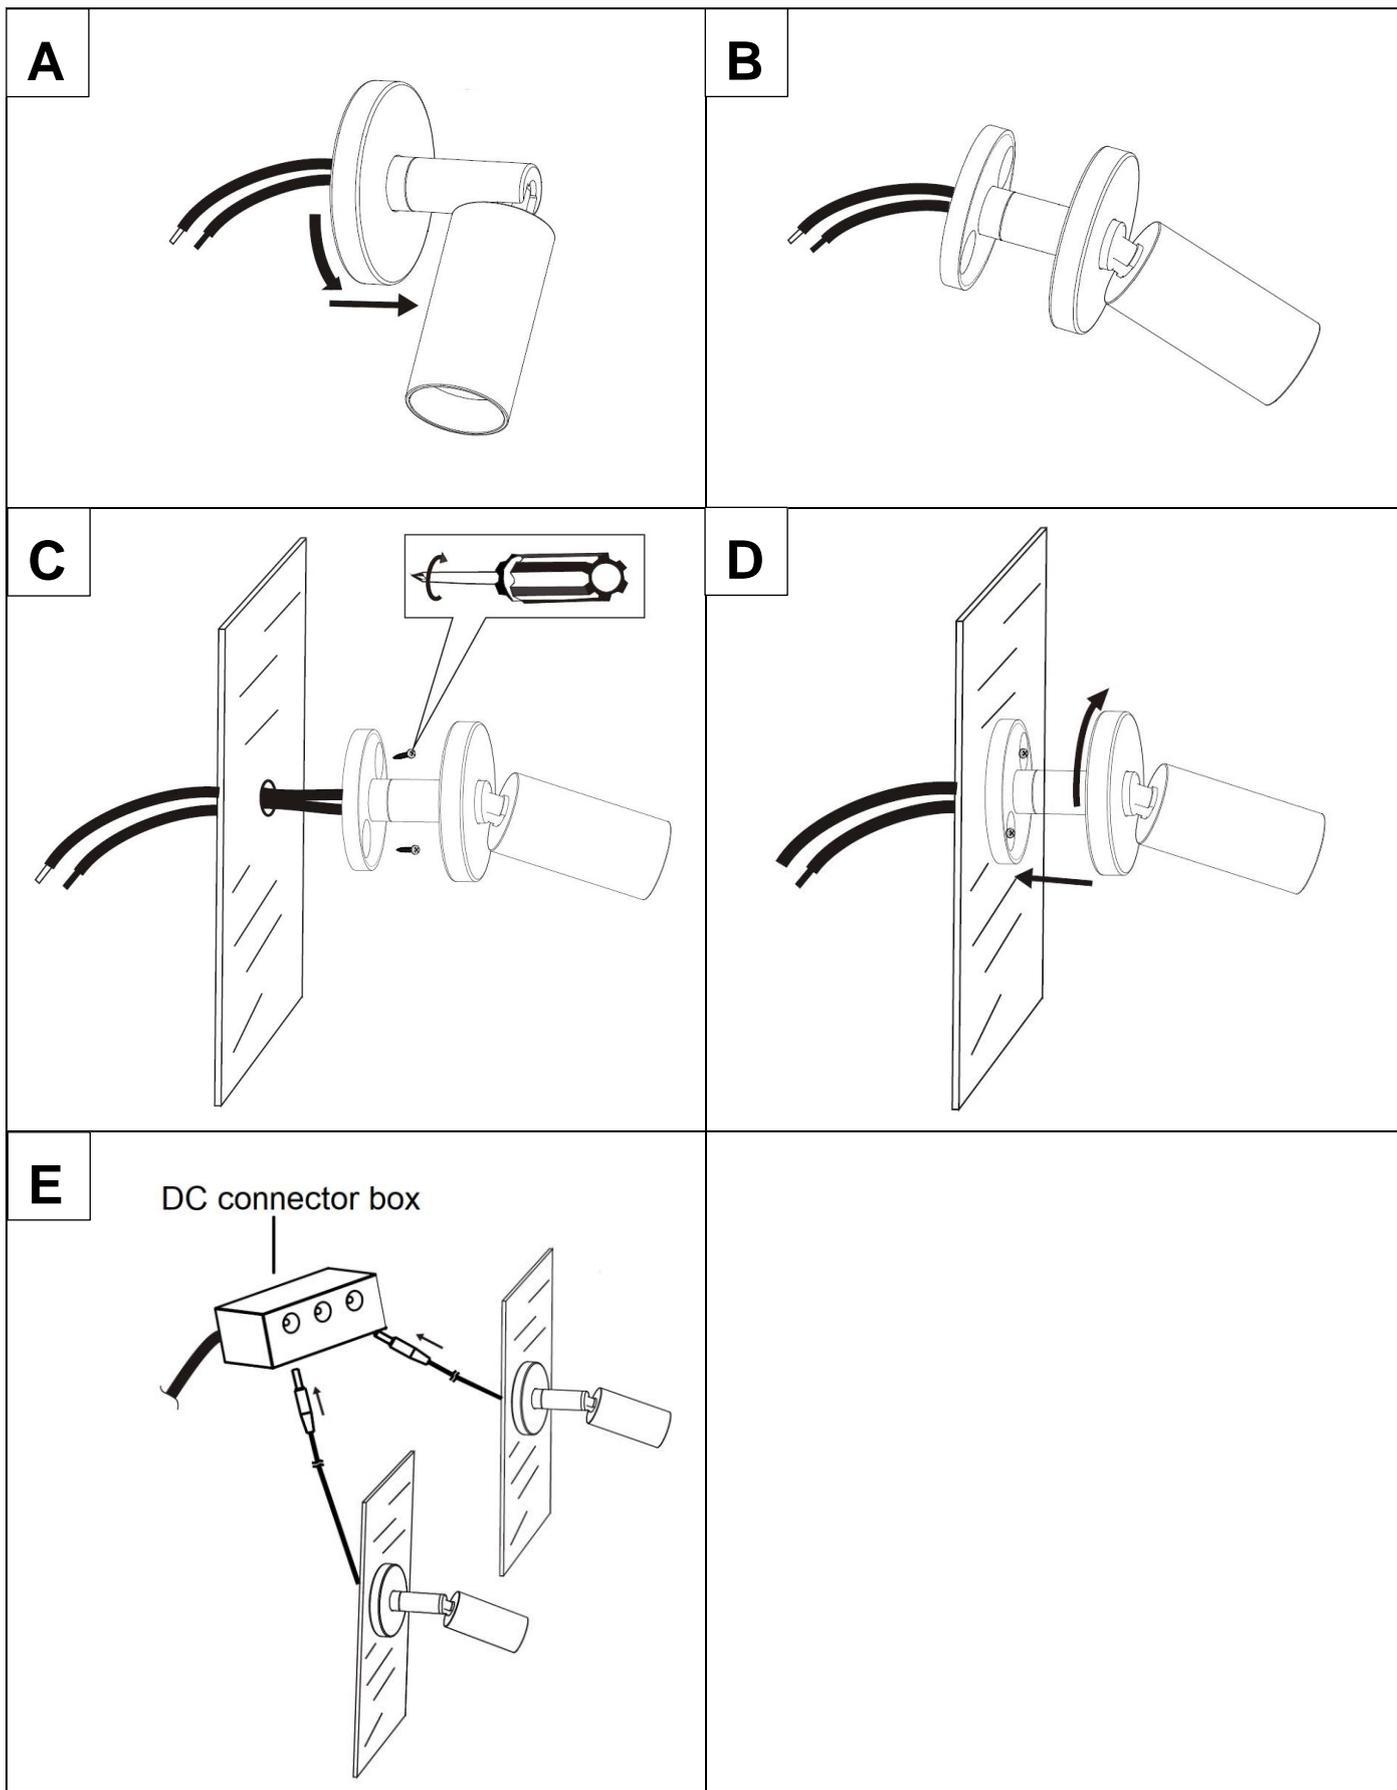

**NOTE: Must have a minimum of two spotlights connected to the DC connector box for normal operation.**

## Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- The LEDs are not replaceable and there are no serviceable parts, do not attempt to dismantle or open the product.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

SKU #	157072	157073
Colour	Black	White
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	8W (including LED driver)	
LED specs	200 Lumens, 3000K, CRI:82, Non-dimmable	300 Lumens, 3000K, CRI:82, Non-dimmable
Weight	0.3kg	
Dimensions	H:35mm Dia:34mm	