

HENSLEY 5LT FLOOR LAMP

SKU# 271054

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep the instructions for future reference.

Warranty

- This fitting is covered by a 12 month warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- Select a suitable location for this light fitting:
 - This product is suitable for indoor use only.
 - Do not place flammable material near or over the fitting.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - If the fitting is placed in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.

- Do not exceed the maximum wattage rating.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.

If parts are missing, return the complete product to the place of purchase for inspection or replacement.

- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the portable lamp is fully assembled with the globe installed and is ready to use for the first time.

Installation Directions

NOTE: Due to the size and weight of the fitting, two people are required to assemble and lift up the shade.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
2. To assemble the lamp shade: Install the glass pieces (O) on the frame of the shade (E). Then secure the glass pieces using the bracket (N) and screws (M).
3. Install the rods (H) to the fitting body (G). The triangle brackets (I) must be placed in between the rods.
4. Install the last triangle bracket (I) and base (J) to the rods (H), then secure by the fixing parts (K) under the base. From top to bottom, these should be in the following order: flat washer, star washer, spring washer, then nut.

NOTE: Ensure all fixing parts (K) are installed on the base in the correct order, and that the nut is secured tightly.

Attach the pad (L) under the base.

Pull the cord out from the bottom as you assemble the fitting to remove any slack in the cord. Take care not to cross thread or twist and damage the cord during assembly.

5. Install the extended rod (F) onto fitting body (G) followed by the cover (D) and nut (C).
6. Install the assembled lamp shade on top of the extended rod (F) followed by the nut (B), and cap (A).
7. Install the globes (P - not included) into the lamp holders. Do not exceed the maximum rated wattage.


8. Select a suitable location for the light fitting. See the installation requirements above.

NOTE: Check that all components are secured tightly and the fitting is stable before inserting the plug into the mains power.

9. Insert the plug (Q) into the mains power socket outlet and ensure it is fully plugged in.

10. Turn power on at the mains power socket outlet.

11. Use the cord-line switch to turn the lamp on/off.

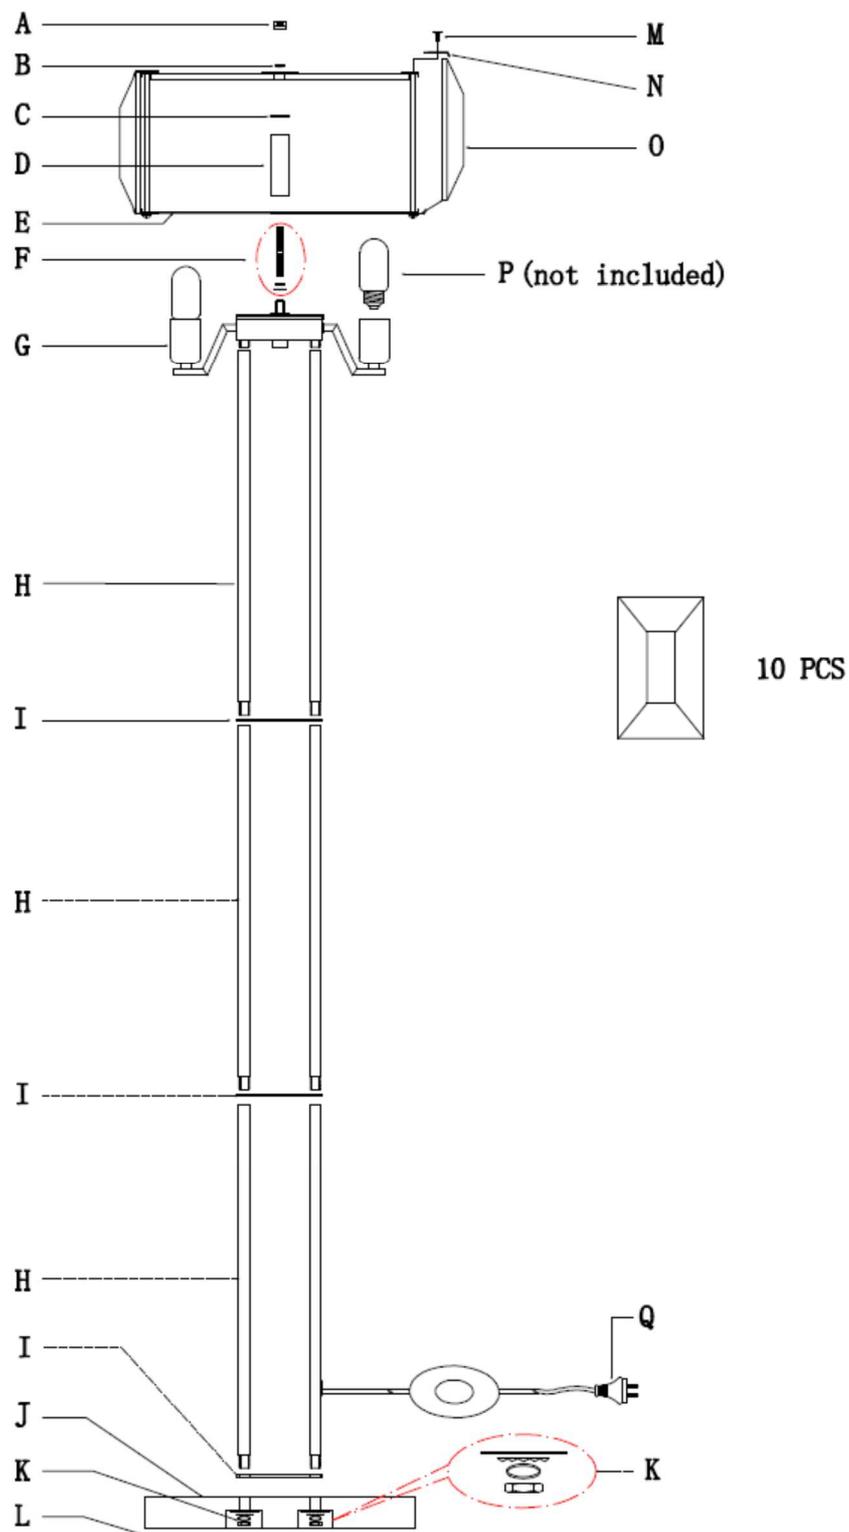

Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Young children should be supervised to ensure that they do not play with the portable lamp.
- Handle the fitting and/or shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	271054
Colour	Matte Black / Black Marble Base
Rated Voltage	220-240V~ 50Hz
Rated Wattage	225W (5 x 45W Max.)
Lamp Holder	ES / E27
Weight	31.5kg
Dimensions	H:1600mm D:460mm